


BAO TONG USA dba TYSONIC BATTERY

CHEMISTRY:
SYSTEM:
MODEL:
SIZE REF.:

Lithium Manganese Dioxide
Primary Li/MnO₂
CR17505
A

Specifications (@23±2°C)

Nominal Voltage	3.0V
Nominal Capacity (@5mA, cut-off 2.0V)	2200mAh
Max. Continuous Current	2000mA
Max. Pulse Current	3000mA
Operating Temperature	-40°C / +70°C
Typical Weight	30g

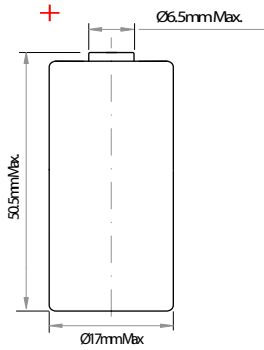

Dimensions in mm

Cautions:

Do not recharge, short circuit, heat, disassemble or dispose of cells in fire. Do not over discharge. Do not reversely insert the positive and cathode in use. Do not solder directly.

