


# BAO TONG USA dba TYSONIC BATTERY

CHEMISTRY:  
SYSTEM:  
MODEL:




LITHIUM MANGANESE DIOXIDE  
PRIMARY Li/MnO<sub>2</sub>  
CR2

## CHARACTERISTICS (@23±2°C)

Nominal Voltage	3.0V
Nominal Capacity (@5mA, cut-off 2.0V)	750mAh
Max. Continuous Current	1000mA
Max. Pulse Current	2000mA
Operating Temperature	-40°C / +70°C
Typical Weight	13g



Dimensions in mm

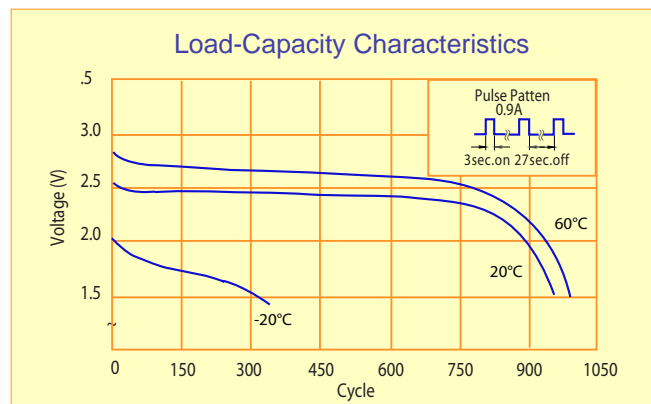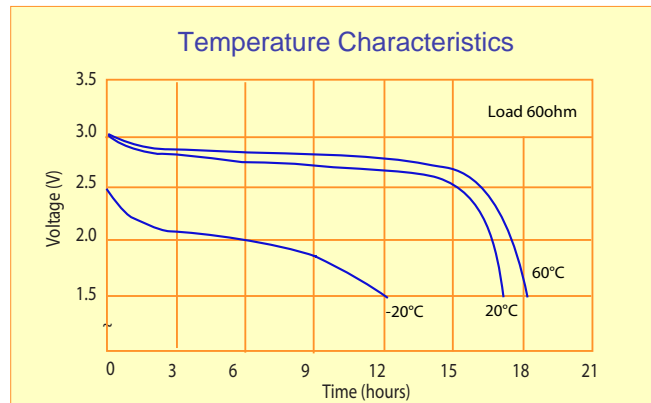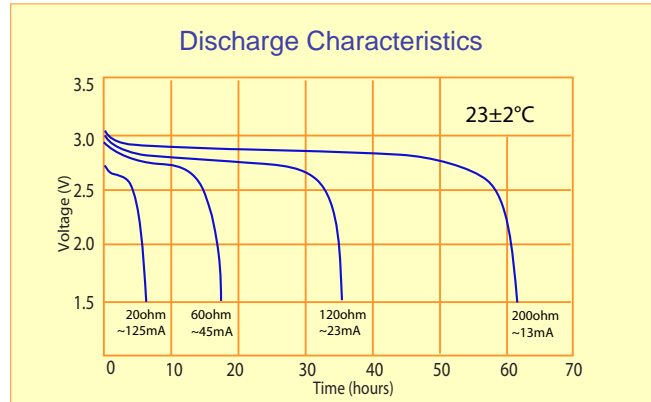

**Cautions:** Do not recharge, short circuit, heat, disassemble or dispose of cells in fire. Do not over discharge. Do not reversely insert the positive and cathode in use. Do not solder directly.