




NON-SPILLABLE SEALED RECHARGEABLE BATTERY


EV12200

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 20.0 Ah	20 hr @ 1.0 A : 20.0 Ah
● DIMENSIONS	10 hr @ 1.8 A : 18.0 Ah
TOTAL HEIGHT : 167 mm (6.58 inches)	5 hr @ 3.2 A : 16.0 Ah
CONTAINER HEIGHT : 167 mm (6.58 inches)	1 hr @ 12.0 A : 12.0 Ah
LENGTH : 181 mm (7.13 inches)	1 C @ 20.0 A : 10.0 Ah
WIDTH : 76.2 mm (3.0 inches)	● INTERNAL RESISTANCE(25°C , 77 °F) : 13 mΩ
WEIGHT : APPROX 6.10 kg (13.45 lbs)	● CHARGING VOLTAGE (25°C , 77 °F)
● MAX DISCHARGE CURRENT : 200 A (5 sec)	STANDBY USE : 2.275±0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 600 A(0.1 sec)	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : RT-08	CYCLE USE : 2.45±0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
: FLAME RETARDANT ABS	● MAX CHARGING CURRENT : 6.0 A


Discharge Characteristics 25 °C (77 °F)

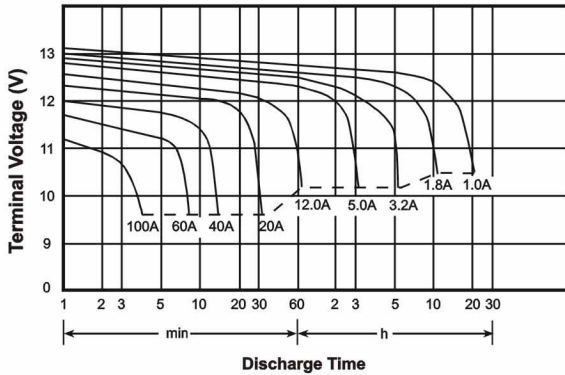

OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY

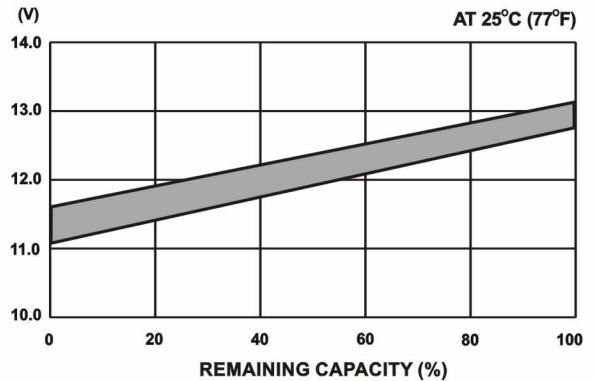

☆ Dimensions

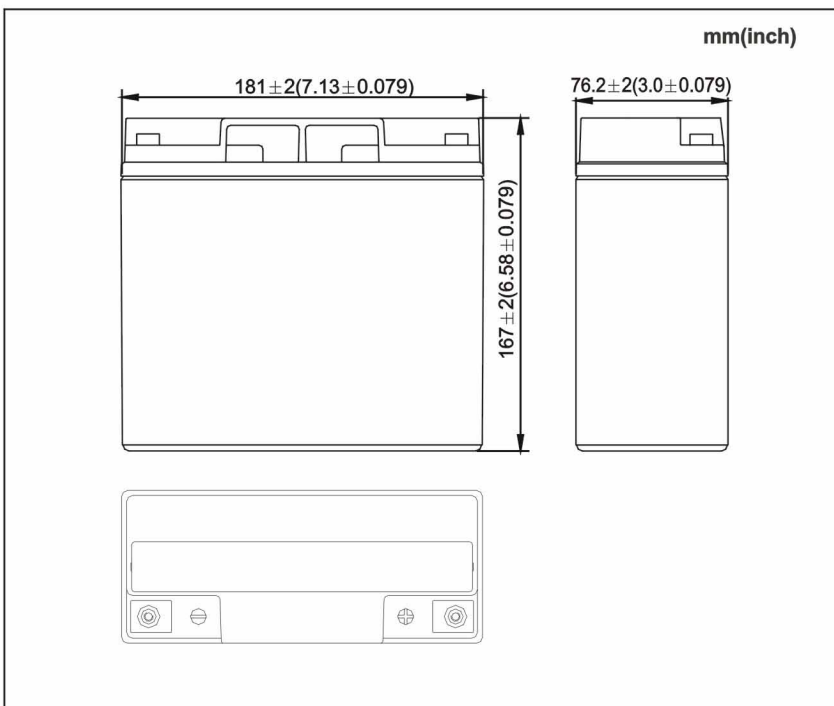

☆ Terminal

